






AR-24D TYPICAL INSTALLATION

COUNTER FRONT CUTOUT REQUIREMENTS

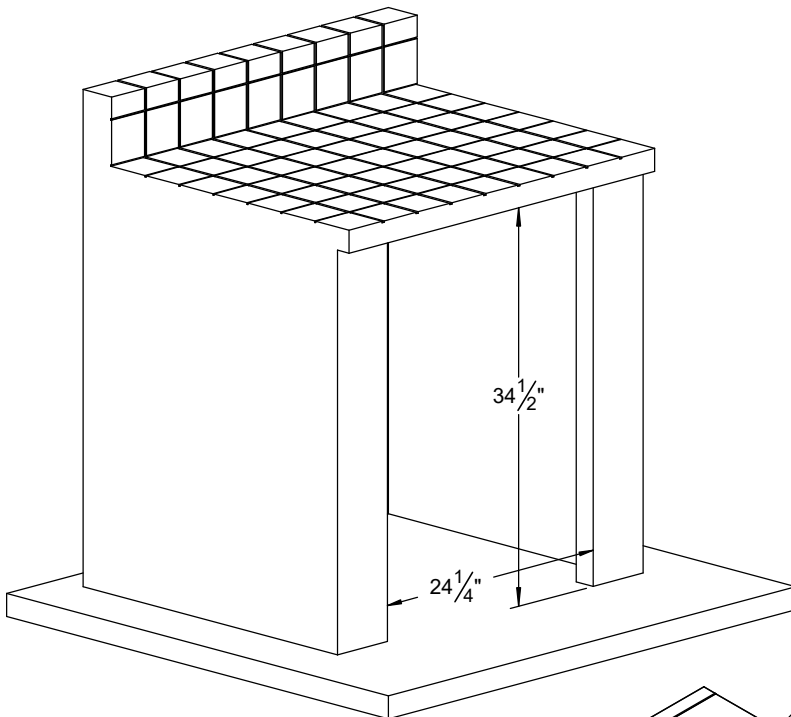

SPECIFICATIONS:
 R-290 REFRIGERANT
 115 VAC - 1 Ø - 3W - 2.1 AMPS
 1.5 RLA - 6.5 LRA - 2.5 MCA
 MOC PD 15 AMPS

GROUNDING RECEPTACLE REQUIRED
 GFCI RECOMMENDED

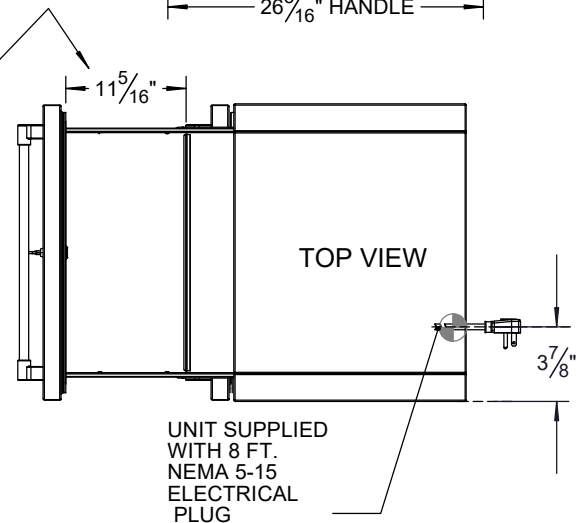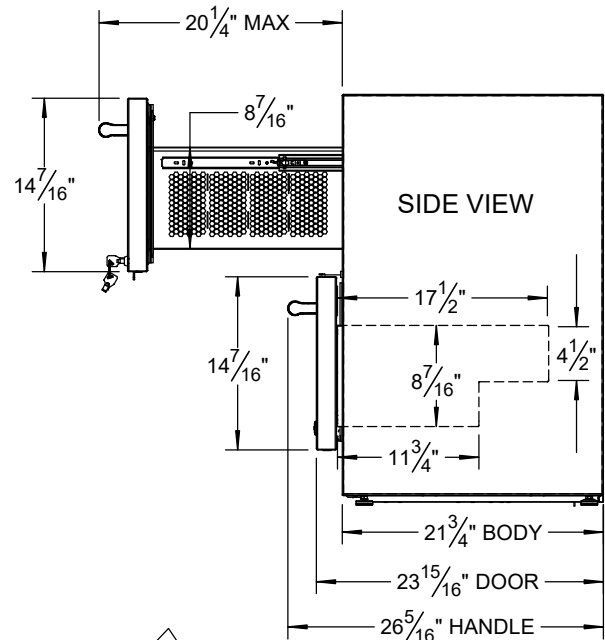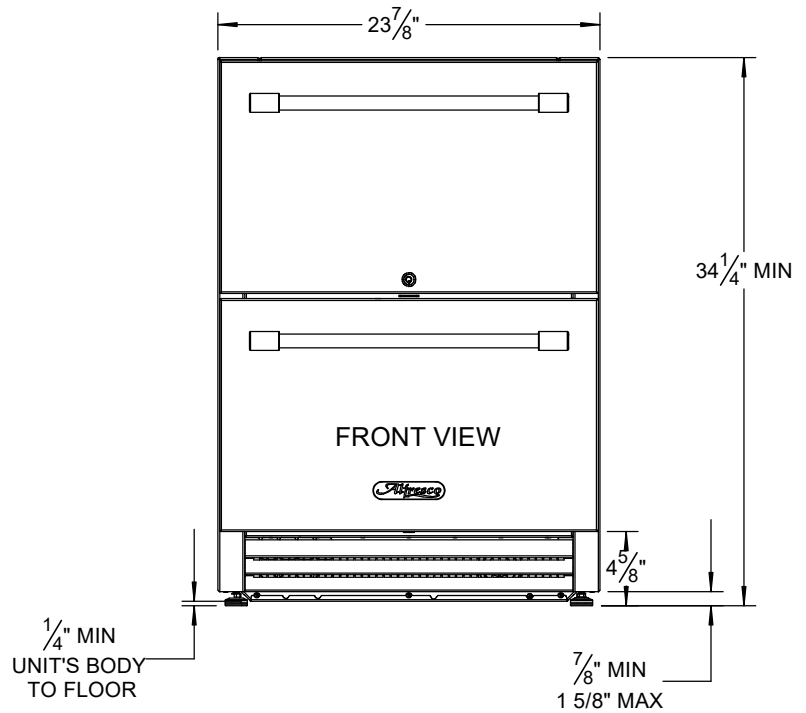

Alfresco

SUPERIOR EQUIPMENT SOLUTIONS
 1085 BIXBY DRIVE
 CITY OF INDUSTRY, CA. 91745

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPERIOR EQUIPMENT SOLUTIONS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION FROM SUPERIOR EQUIPMENT SOLUTIONS, INC. IS PROHIBITED.

DRAWN BY: JORGE PELAYO
 CREATED: 06/25/2025

PROJECT TITLE: **AR-24D**

DRAWING TITLE:

AR-24D REFRIGERATOR SPECIFICATIONS

DRAWING NO.:
AR-24D SPEC SHEET

SHEET 1 OF 1