

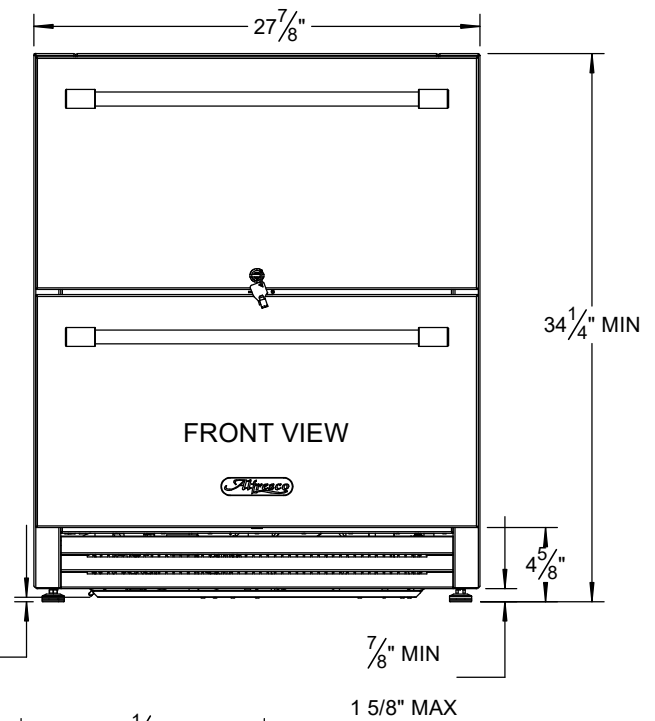
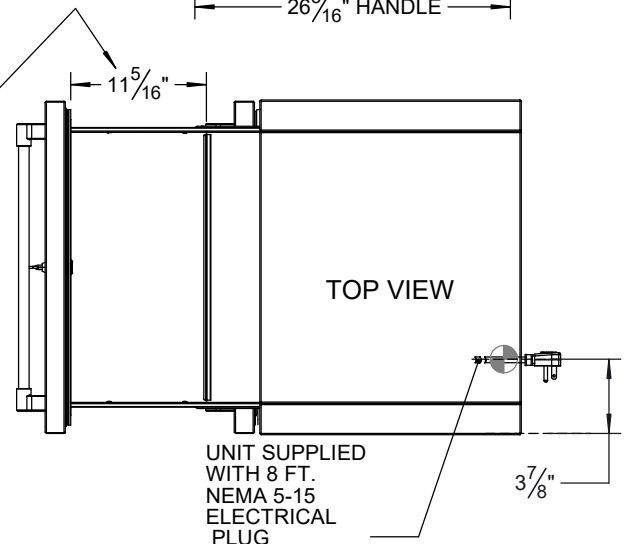



AR-28D TYPICAL INSTALLATION

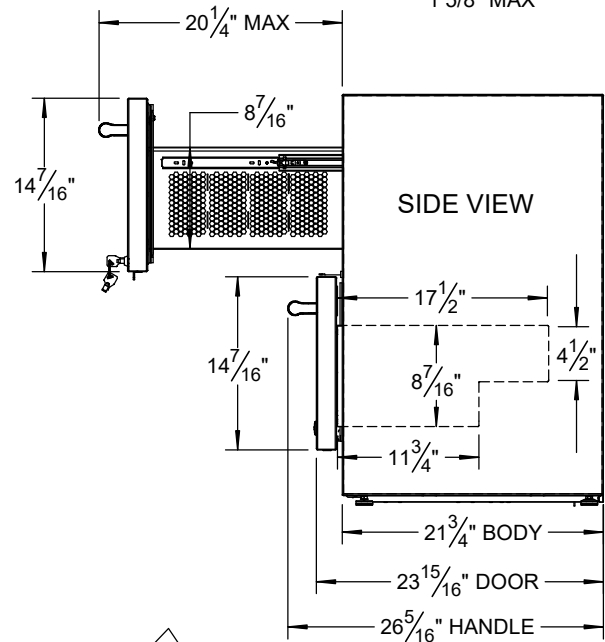

COUNTER FRONT CUTOUT REQUIREMENTS

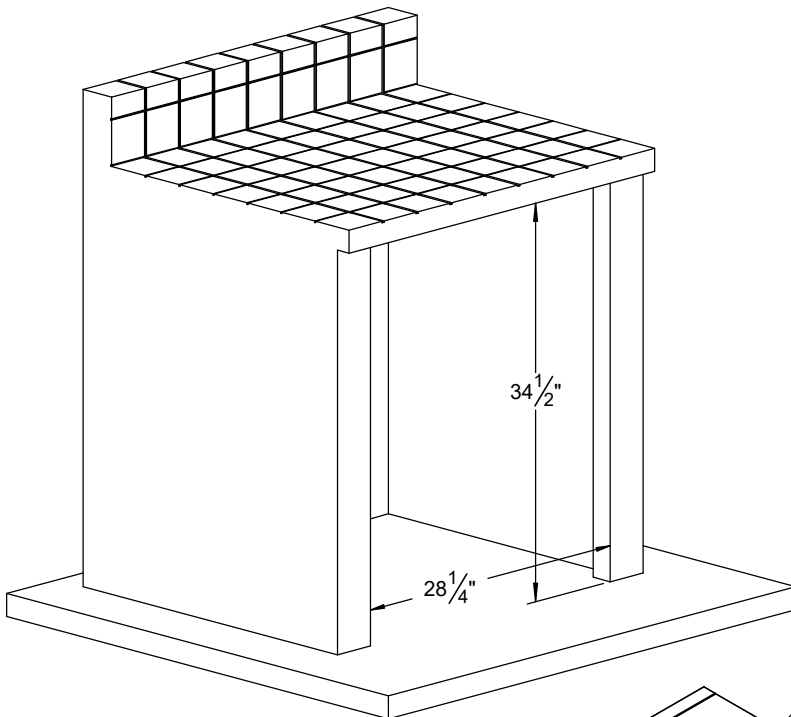

SPECIFICATIONS:  
R-290 REFRIGERANT  
115 VAC - 1 Ø - 3W - 2.1 AMPS  
1.5 RLA - 6.5 LRA - 2.5 MCA  
MOC PD 15 AMPS

GROUNDING RECEPTACLE REQUIRED  
GFCI RECOMMENDED