


## 3/4B PROFESSIONAL CART ASSEMBLY INSTRUCTIONS

### HARD WARE:

1. M6×16 screw 16pcs (for casters)
2. M5×12 screw 16pcs (for double side shelves)
3. M6×8 screw and flat washer, 6sets (for door & drawer handles)
4. M4×10 screw and nut, 4 sets (for transformer)
5. M5×12 screw, 2pcs (to secure BBQ firebox with cart)
6. Flathead screwdriver, 1pcs
7. Cross screwdriver, 1pcs


### External View

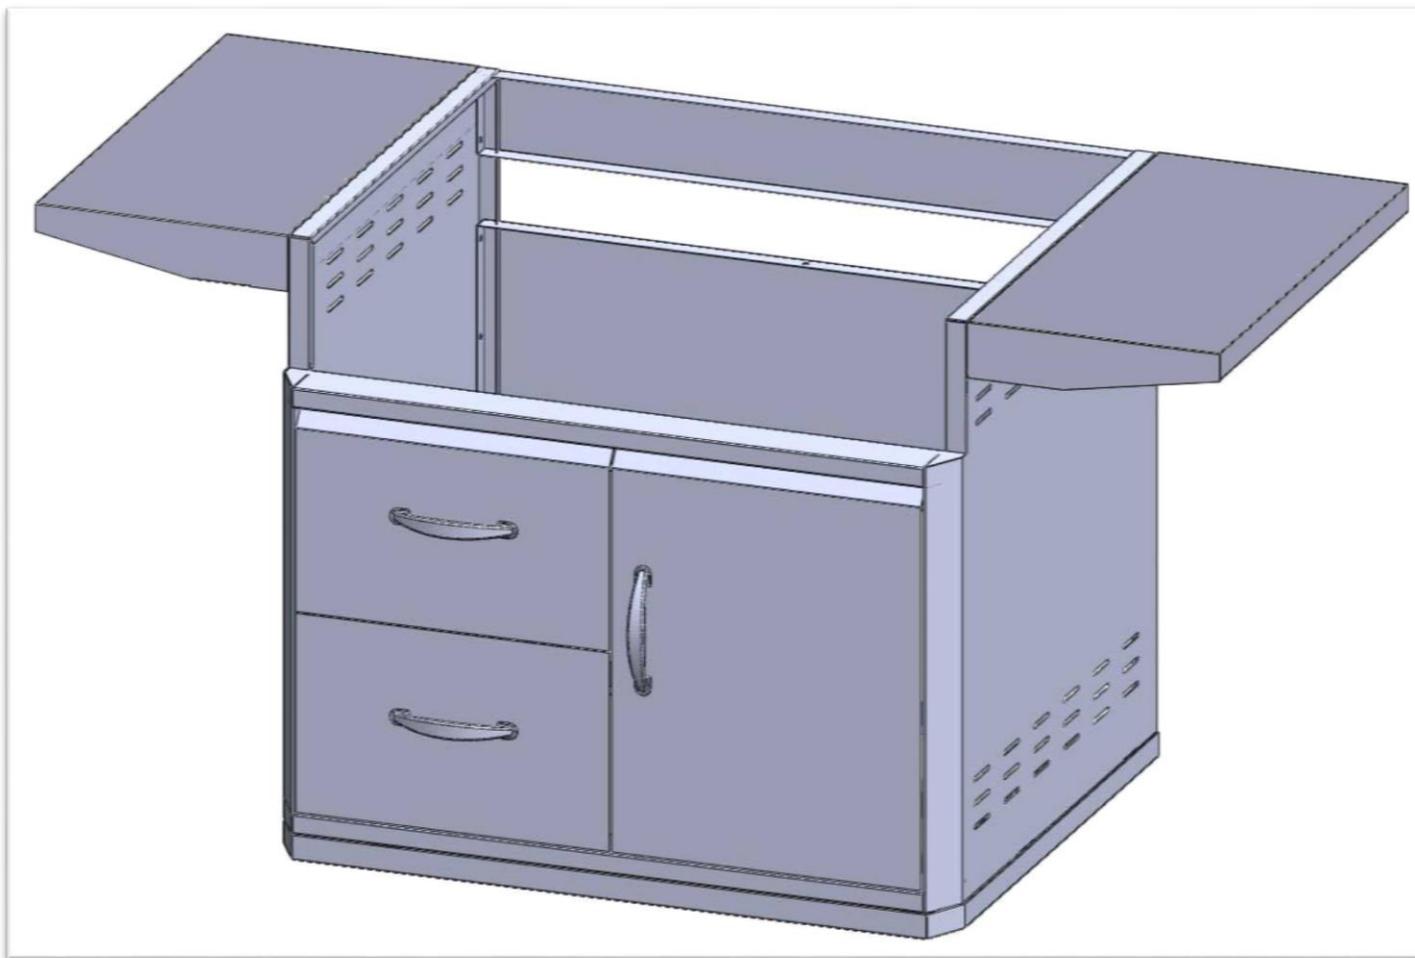

# INSTALLATION

**Step 1:** Remove all parts from the carton and please use an assistant to help in this cart assembly.

**Step 2:** Turn the cart on it's side and position all the castors and secure them with 4 pieces @ M6\*16 screws.

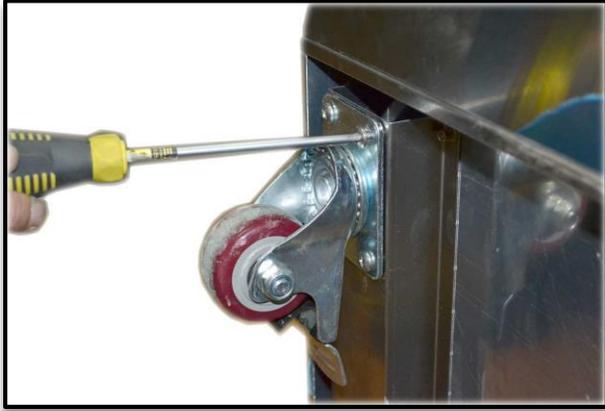

**Step 3:** Turn the Cart upright and then remove the 2 Packing bars that run across the top of the cart and discard




**Step 4:** Attach the Right & Left Side Shelf Brackets (Arrow pointing up) to both sides of the cart,

using 4 pcs @ M5\*12 screw on each Bracket.

*Before*



*After*

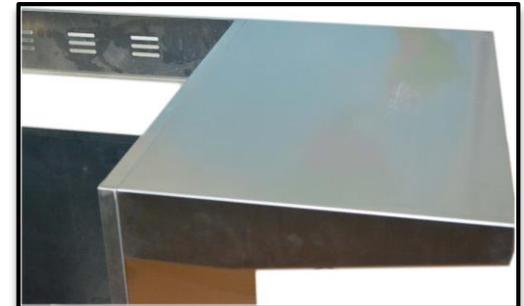

**Step 5:** Attached the Front Door Handle to the Front Door using 2pcs M6\*8 screw, 2 @ M6 Flat

Washer. Repeat for each Drawer handle.





**Step 6:** Attach the Transformer to the Back inside panel of the Cart using 4 @ M4\*10 screws & M4 Nuts and then thread the Power cord out through the bottom hole in the Back panel.



**Note:** Some adjustments

level positioning in the cart. Make sure to tighten all screws with screwdriver.

**Step 7:** Finally, the barbecue is ready to be installed into the cart. Use an assistant to help with this operation, as the barbecue is very heavy. As you slide the barbecue into the cart from the front, thread the Power Lead through the Grommet at the bottom rear of the barbecue and attached it to the Transformer. Once the barbecue is pushed all the way back into the cart, secure the barbecue to the cart using 2pcs M5\*12 screw through the holes on either side at the rear of the cart

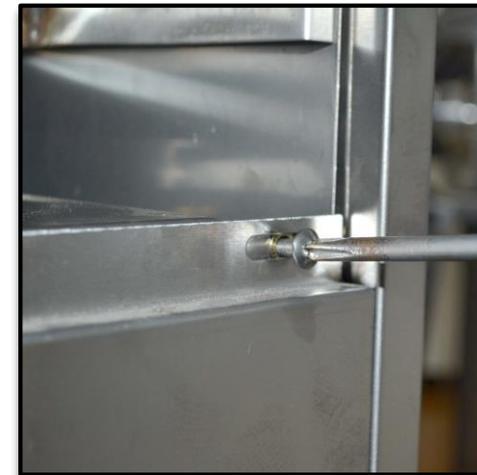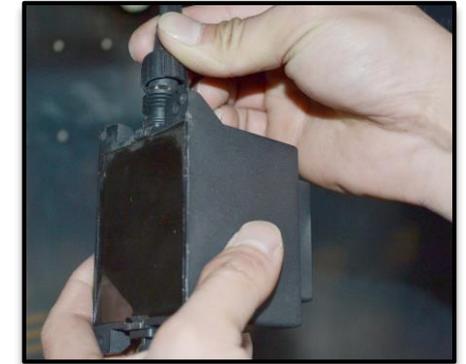

LP Barbecues – Thread the LP hose through the top hole in the cart back panel and attach it to the barbecue. - **ALWAYS do a leak test on all fittings before operating the barbecue**



(Note: The Propane tank is held in position by the Tank Bracket screw (M14\*38) that clamps the tank in place.)

