



OUTDOOR—REFRIGERATION

Undercounter/Freestanding 15"W. Ice Machine



Standard Features & Accessories

Model includes

- Produces up to 65 lbs. of clear ice per day
- 26 lb. capacity ice bin
- 1" x 1-1/8" x 1-1/4" cube size
- LED light
- LED control panel
 - Power On/Off
 - Check water alert
 - Time to clean alert
- Water quality sensor
- Stainless steel exterior cabinet
- Tru-Flush™ design
- Agency certified for outdoor use
- Self-closing door
- 90° door stop option
- Black kickplate with stainless steel cover
- Adjustable leveling legs

Model Options



**FGIM515/FPIM515
Professional Door Panel
(PIDP15)**

FINISH DETAILS FOR FGIM/FPIM MODEL

- Accepts optional Professional door panel
- Professional door panel available in stainless steel (SS)
- Professional door panels must be ordered left hinge (LH) or right hinge (RH)





OUTDOOR—REFRIGERATION

Undercounter/Freestanding 15"W. Ice Machine




★ Please see Installation Notes & Accessories for important information, including drain pump.

Dimensions & Specifications

PRODUCT DIMENSIONS & DOOR SWING



FGIM515/FPIM515
Professional Door Panel
(PIDP15)

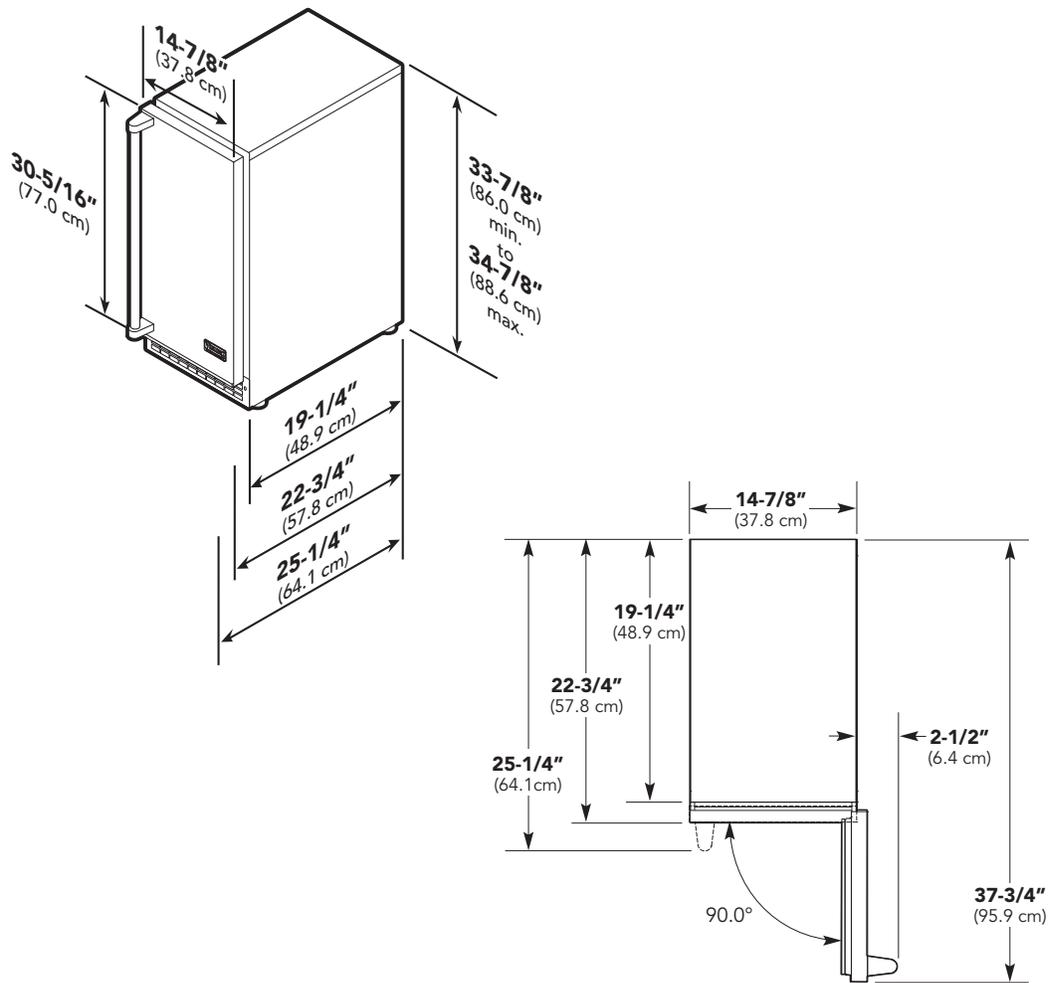

	FGIM515	FPIM515
Overall width	14-7/8" (37.8 cm)	
Overall height (from bottom)	33-7/8" (86.0 cm) min. to 34-7/8" (88.6 cm) max.	
Overall depth (from rear)	19-1/4" (48.9 cm)	
To front of handle	22-3/4" (57.8 cm)	
With door fully open	25-1/4" (64.1 cm)	
Approx. ship weight	113 lbs. (51.2 kg)	118 lbs. (53.5 kg)





OUTDOOR—REFRIGERATION

Undercounter/Free-standing 15"W. Ice Machine



UTILITY REQUIREMENTS



GAS
Not applicable



- ELECTRICAL**
- 6' (1.8 m), 3-wire cord with grounded, 3-prong plug attached to product
 - 115V/60 Hz; 15-amp dedicated circuit
 - Max. amp usage—5.0




- PLUMBING**
- Inlet waterline requirements—1/4" (0.64 cm) OD copper tubing
 - 20 psi min.; 80 psi max.

Installation Requirements

ACCESS REQUIREMENTS



FGIM515/FPIM515
Professional Door Panel
(PIDP15)

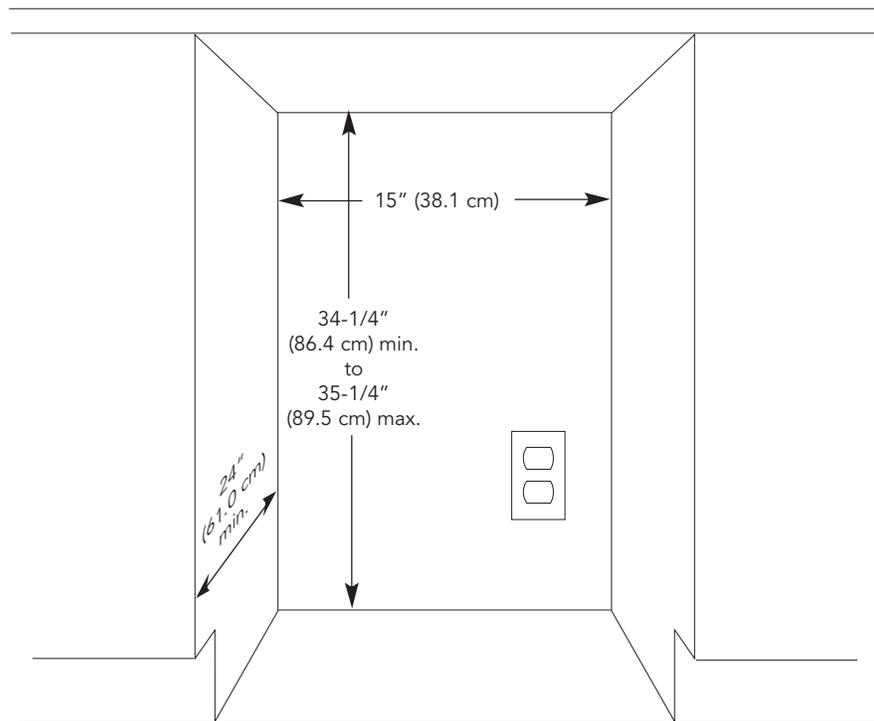

FGIM515/FPIM515

Cutout width	15" (38.1 cm)
Cutout height	34-1/4" (86.4 cm) min. to 35-1/4" (89.5 cm) max.
Cutout depth	24" (61.0 cm)





OUTDOOR—REFRIGERATION

Undercounter/Freestanding 15"W. Ice Machine



✦ Installation Notes & Accessories

Door Panel Kits

- For use with custom panel ice machine
- Kit includes one door panel and installation hardware
- Order "R" for right hinge or "L" for left hinge

Model	Description	Approx. ship wt. lbs. (kg)
PIDP15L-SS	Professional door panel LH (Stainless Steel)	14 (6.3)
PIDP15R-SS	Professional door panel RH (Stainless Steel)	14 (6.3)

Drain Pump Kit

- For use with FGIM ice machine when floor drain is not available

Model	Description	Approx. ship wt. lbs. (kg)
DP-FGIM	Drain pump	2 (0.9)

Stainless Steel Cabinetry-Bases

- Stainless Steel (SS)
- For use with 15"W. & 24"W. Viking outdoor refrigeration products
- See individual product pages (storage section) for more information and additional specifications

Model	Description	Approx. ship wt. lbs. (kg)
VURO2400	Base for 15"W outdoor refrigerator	115 (52.2)

Compliance Information



WARRANTY SUMMARY*

- Two-year full warranty—complete unit (w/in-home repairs)
- Six-year full warranty—sealed refrigeration system (includes compressor, condenser, dryer/strainer, evaporator, and connecting tubing)
- Twelve-year limited warranty—sealed refrigeration system
- Ninety-day limited warranty—cosmetic parts such as glass, painted, and decorative items

*For complete warranty see *Use & Care Guide*. Warranty valid on Viking products shipped within the United States and Canada.

